

X50 CrMoV 8-1

1.2631V

Richtanalyse / chemical analysis in %

C	Si	Mn	P	S	Cr	Mo	Ni	V	W
0,45	0,80	0,40			8,00	1,10	-	0,40	-
-	-	-	<	<	-	-		-	
0,55	1,00	0,60	0,035	0,035	9,00	1,30	-	0,60	-


Wärmebehandlung / heattreatment advice

Härteempfehlung
recommendation of hardening

980-1050°C / 1800-1920°F

Abschreckmittel
quenching medium

Öl / oil

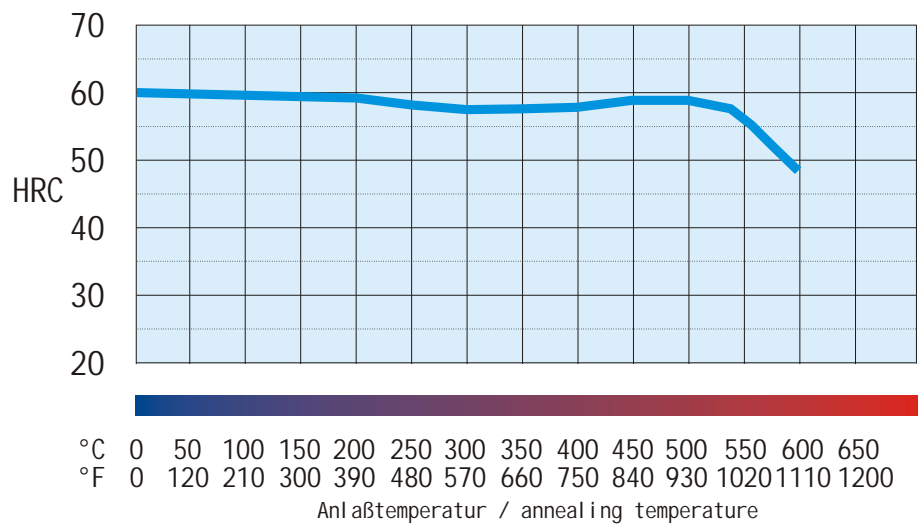

Anwendungsbeispiele / examples of use

- Holzhackmesser / chipper knives